

Tailor-made innovation:

- Allows intensive and secure passage
- Modular apron facilitating maintenance
- Equipped with shape memory stiffeners for better support of the apron
- Optional ATEX configuration possible
- Engine directly on shaft or on the front
- Deported box integrating the buttoning



**MADE IN
FRANCE**




Emergency openings:

Mechanical opening at 75%



Counterweight/inverter option
(Emergency output)

Inverter opening at 75%
Autonomy of 15 min

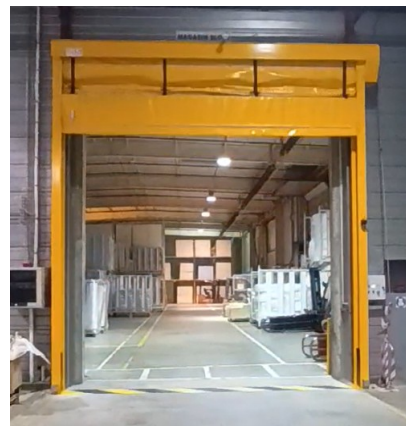

Structure:

- Self-supporting metal in lacquered steel
- Option Stainless Steel 304 L / Galvanized Steel
- Polyurethane finish paint (2 coats)
- Power supply – 400 V Tri
- Three-phase motor (Opening and closing speeds at 0.8 m/s.)

Ral 9010	Ral 9016	Ral 1015	Ral 1021
Ral 1003	Ral 2024	Ral 3002	Ral 5015
Ral 5010	Ral 5002	Ral 6026	Ral 7035
Ral 9006	Ral 7038	Ral 7037	Ral 9005

Desk + Box:

- Auto selector
- Opening button
- Flush button closure
- Contactless button
- Emergency stop

Waterproof panel: up to IP65



Modular curtain:


- The modular apron allows:
- a decrease in maintenance costs
- an accelerated restoration
- PVC coated polyester fabrics, Fire resistance M3 and M2
- Visibility bands



Cadence T30

The fast door outside

Cadence T30

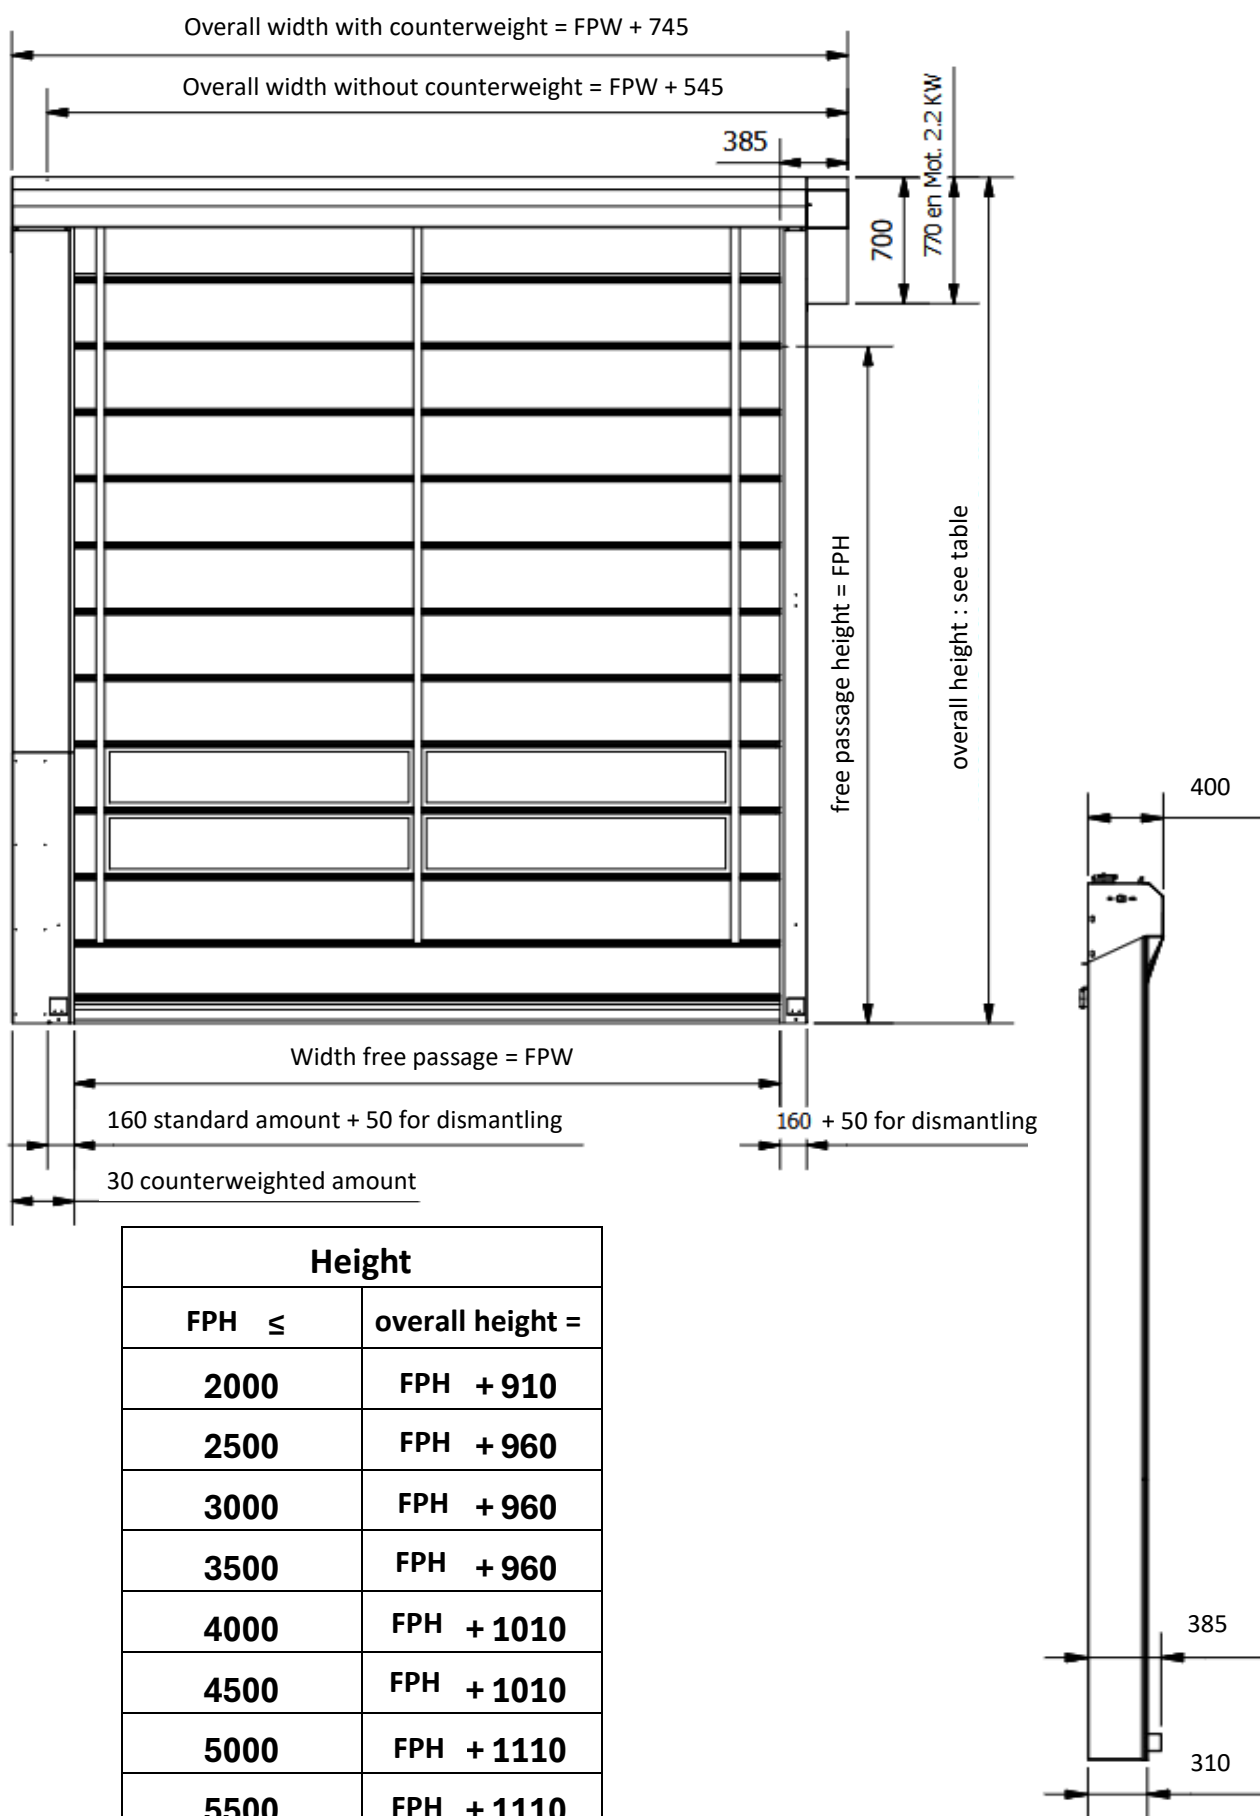

Cadence T30

The fast door outside

Cadence T30

Spécification	Cadence T30
Dimension	
Maximum standard (Lxh)	5 000 x7 000
ATEX	option
Structure	
Apply	✓
Table	✓
Self-supporting metal	✓
Engine integrated in crosspiece at the end of the shaft	✓
	✓
lacquered steel Ral : 1015 / 1003 / 2024 / 3002 / 5010 / 6026 / 7037 / 9016 / 7038 / 7035 / 9006 / 5015 / 5002 / 9005 / 2021 / 9010	
Finishing polyurethane paint (2 coats)	✓
Stainless steel 304 L	option
Galvanized Steel	option
Engine on the front	option
curtain	
PVC coated polyester fabrics 900 g/m 2	✓
Fire resistance M3 Ral : 1015 / 1003 / 2024 / 3002 / 5010 / 6026 / 7037 / 9016 / 7038 / 7035 / 9006 / 5015 / 5002 / 9005 / 2021 / 9010	✓
Fire resistance M2 600 g/m2 Ral: 941, 652, 5015	option
Reinforced waterproofing: low – lateral – high	X
Shape memory stiffeners	✓
Wind resistance 120 Km/h	✓
Visibility bands (400mm)	option
Reinforced thermal insulation	option
Semi-modular apron	option
480mm modular apron	✓
Motorization	
Three-phase anti-fall motor with reducer mounted at the end of the transmission shaft IP54 optional IP65	✓
Active brake for lack of power. IP54 option IP65	✓
Opening and closing speeds at 0.8 m/s.	✓
Power supply – 240/400 V Tri + Ground	✓
Control cabinet & interlocks	
Deported	✓
Automatic	✓
Plastic IP 55	✓
Metal Box	option
Pressure maintained	option
Information relates to terminal	option
SAS function	option
Boutonnerie confort	X
opening control	
Contactless, Zipper, Flush button	✓
Remote control, Radar, Ground magnetic loop	✓
Security	
Compliant EN 13241-1	✓
Safety radar	option
Magnetic loops	option
emergency operation	
Retention tab	option
Crank	option
Counterweight	option
Automatic counterweight	option
Ratchet wrench	X